



## 热卖产品目录



散热器系统和地暖系统相关产品

R470



Thermostatic head with liquid sensor with anti-freeze protection position.  
恒温控制头 (液体介质、带防冻保护装置)

产品型号	尺寸	■	□
R470X001	-	1	50



R14TG



Angle lockshield valve, chrome plated, with iron pipe connection, brass caps.  
内丝锁闭角阀 (镀铬、带自封闭尾管)

产品型号	尺寸	■	□
R14X032	3/8"	1	50
R14X033	1/2"	1	50
R14X034	3/4"	5	50
R14X035	1"	2	20
R14X036	1 1/4"	2	20

\* Tail piece without self sealing/非自封闭尾管

R16TG



Angle lockshield valve with plastic coated tailpiece, chrome plated, screwed ends and self-sealing tail pieces.  
内丝锁闭角阀 (铜冒、镀铬、带自封闭尾管)

产品型号	尺寸	■	□
R16X032	3/8"	1	50
R16X033	1/2"	1	50



R29



Angle lockshield valve, chrome plated, with adaptor connection and self-sealing tail piece.  
外丝锁闭角阀 (镀铬、带自封闭尾管)

产品型号	尺寸	■	□
R29X032	3/8"x16	1	50
R29X033	1/2"x16	1	50
R29X034	1/2"x18	1	50
R29X035	3/4"x18*	5	50
R29X036	3/4"x22*	5	50

\* Tail piece without self sealing-Brass caps/非自封闭尾管-非铜冒

R5TG



Manual angle valve, chrome plated, with iron pipe connection and self-sealing tail pieces.  
内丝手动温控调节角阀 (镀铬、带自封闭尾管)

产品型号	尺寸	■	□
R5X032	3/8"	1	50
R5X033	1/2"	1	50
R5X034	3/4"	5	50
R5X035	1"	2	20
R5X036	1 1/4"	2	20

\* Tail piece without self sealing/非自封闭尾管

R431TG



Micrometric angle valve with thermostatic option, chrome plated adaptor connection and self-sealing tail pieces.  
外丝手/自动温控调节角阀 (镀铬、带自封闭尾管)

产品型号	尺寸	■	□
R431X032	3/8"x16	1	50
R431X033	1/2"x16	1	50
R431X034	1/2"x18	1	50

NOTES

Adaptor connection, to complete with R178,R179 or R179AM.

适配器R178,R179或R179AM

R411TG



Angle valve with thermostatic option, chrome plated, with connection for adaptor, self-sealing tail piece and cover to protect body before assembling.  
外丝温控角阀 (带自密闭式尾管、镀铬、带简易自调节装置)

产品型号	尺寸	■	□
R411X032	3/8"x16	1	50
R411X033	1/2"x16	1	50
R411X034	1/2"x18	1	50

R01TG



Angle valve with thermostatic option, chrome plated, with iron pipe connection, self-sealing tail piece, with cover to protect body before assembling.  
内丝温控角阀 (带自密闭式尾管、镀铬、带简易自调节装置)

产品型号	尺寸	■	□
R401X132	3/8"	1	50
R401X133	1/2"	1	50
R401X034	3/4"	5	50
R401X035	1"	2	20

R179



Multilayer and synthetic pipe adaptor.  
适配器 (用于多层管及合成管)

chrome plated/镀铬

产品型号	尺寸	■	□
R179MX012	16x(14x2)	25	250
R179MX014	16x(16x2)	25	250
R179MX015	16x(18x2)	25	250
R179MX020	16x(20x2)	25	250
R179MX022	18x(14x2)	25	250
R179MX024	18x(16x2)	25	250
R179MX025	18x(18x2)	25	250
R179MX026	18x(20x2)	25	250

R200



Automatic air vent valve, chrome plated.  
散热器排气阀 (镀铬)

产品型号	尺寸	■	□
R200X001	1" right/右边	10	100
R200X002	1" left/左边	10	100
R200X003	1 1/4" right/右边	5	50
R200X004	1 1/4" left/左边	5	50

R478



Electrical actuator, normally open, for manifolds and valves with thermostatic option.  
电动温控阀 (常开型、2线)

产品型号	尺寸	■	□
R478X121	230V~	1	20
R478X122	24V~	1	20
R478VX121	230V~	1	20

R478VX121: with varistor.

NOTES

2 wires cable length 1,50 mt.  
两根接线长1.5米

R478VX121: with varistor.

R478VX121: 带变阻器

CERTIFICATION AND SYMBOLS



R473



Electrical actuator, normally closed, for manifolds and valves with thermostatic option and R291, R292E zone valves.  
电动温控阀 (常闭型、2线)

产品型号	尺寸	■	□
R473X121	230V~	1	20
R473X122	24V~	1	20
R473VX121	230V~	1	20

R473VX121: with varistor.

NOTES

2 wires cable length 1,50 mt. 两根接线长1.5米

R473VX121: with varistor

R473VX121: 带变阻器

CERTIFICATION AND SYMBOLS



## 散热器系统和地暖系统相关产品

### R580M

Modular manifold, with bayonet connection.  
模块式分集水器组件



产品型号	尺寸	■	□
R580MY106	DN32x3/4"E	1	50
R580MY006	DN32x18	1	50
R580MY005	DN25x16	1	100

### R53VM

Modular manifold DN32, for use on return, with bayonet connection, built-in valve with thermostatic option and adaptor connection.  
模块式集水器组件 (DN32, 用于集水器, 组件间卡口连接, 内置安装温控装置的温控阀, 适配器接管)



产品型号	尺寸	■	□
R53VMY006	1"x18xDN32	1	20

NOTES  
N.: To complete with R478, R478M, R473, R473M. 连接R478, R478M, R473, R473M

### R580T

Pair of end manifolds, with bayonet connection for R580M, female thread and base adaptor connection.  
模块式分集水器终端组件 (卡口连接R580M组件, 适配器接管)



产品型号	尺寸	■	□
R580TY004	3/4" x16xDN25	1	50
R580TY005	1" x16xDN25	1	50
R580TY006	1" x18xDN32	1	50
R580TY007	1 1/4" x18xDN32	1	50

### R53VT

Pair of end manifolds DN32, with bayonet connection, female thread, flow meter, balancing lockshield valves with mechanical memory and adaptor connection.  
模块式集水器终端组件 (DN32, 组件间卡口连接, 内置带记忆功能的温控阀, 适配器接管)



产品型号	尺寸	■	□
R53VTY006	1"x18xDN32	1	20
R53VTY007	1 1/4" x18xDN32	1	20

NOTES  
To complete with R478, R478M, R473, R473M. 连接R478, R478M, R473, R473M

### R553D

Pre-assembled distribution manifold for radiant heating and cooling systems.  
预装式分集水器 (辐射采暖或制冷系统用)



base 18/φ18标准连接件			
产品型号	尺寸	■	□
R553Y002-012	1"x18 /2-12	1	-
R553Y022-032	1 1/4" x18 /2-12	1	-

### R557

Pre-assembled manifold for radiant systems supplied with high temperature water.  
装置的分集水器。




base 18/φ18标准连接件			
产品型号	尺寸	■	□
R557Y002-012	1"x18 /2-12	1	-

与R401和R14共同使用, 需单独订购

### R553D-1

Pre-assembled distribution manifold for radiant heating and cooling systems.  
新型预装式分集水器 (辐射采暖或制冷系统用)



base 18/φ18标准连接件			
产品型号	尺寸	■	□
R553Y062-072	1"x18 /2-12	1	-

支架需单独订购, R588 和R588L

### R259DST

Couple ball valves, female-male connections with tail piece, T handle and R540Y015 3/8" thermometer integrated. Standard port.  
带活接的标准通径球阀 (带温度表、红色蝶形手柄)



产品型号	尺寸	■	□
R259SY067	1" x1"	1	10



CERTIFICATION AND SYMBOLS



### R554I

Self-sealing end piece for manifolds, with automatic air vent and draining lockshield valve, brass finish.  
分集水器使用排气泄水装置 (带自封闭尾管, 黄铜材质)



产品型号	尺寸	■	□
R554IY004	3/4"	5	50
R554IY005	1"	5	50

### R554B

Self-sealing end piece for manifolds, with automatic air vent and draining lockshield valve complete with: R591D - 3/8" R881 - 1/2" R608.  
分集水器使用排气泄水装置 (带自封闭尾管, 黄铜材质, 配件有: R591D - 3/8" R66A - 1/2" R608.)



产品型号	尺寸	■	□
R554BY004	3/4"	1	20
R554BY005	1"	1	20
R554BY006	1 1/4"	1	20

### R147N

Adjustable differential valve for heating systems, female connections.  
压差旁通阀



产品型号	尺寸	■	□
R147NY004	3/4"x3/4"	1	25

### R156系列

Thermostatic mixing valve for distribution of sanitary hot water and integration with thermal solar system.  
三通混水阀 (可用于卫浴及高温太阳能)



产品型号	尺寸	■	□
R156X004	3/4"	1	25
R156X024	3/4"	1	25
R156X005	1"	1	25
R156X025	1"	1	25

NOTES

R156

R156-1

Temperature range: 38° C to 60° C.  
温度范围: 38° C到60° C

CERTIFICATION AND SYMBOLS





## 散热器系统和地暖系统相关产品

### R291



2 way piston zone valve male-male with tail pieces.  
Connection for R473, R473M electrical actuators.  
两通区域阀 (电驱动, 用R473、R473M驱动, 带尾管)

产品型号	尺寸	■	□
R291Y004	3/4"	1	10
R291Y005	1"	1	10

### R557JX



Thermostatic mixing unit for radiant floor heating systems at fixed point delivery temperature up to 24kW.  
系统混水装置 (采暖用)

产品型号	尺寸	■	□
R557JX001	3/4"	1	-
R557JX002	1"	1	-

### R991



Automatic air vent valve, with isolating valve, brass finish.  
自动排气阀 (大排量、带隔离阀)

产品型号	尺寸	■	□
R991Y002	3/8"	1	50
R991Y003	1/2"	1	50

### R881



Automatic air vent valve with isolating valve, brass finish.  
自动排气阀 (带隔离阀)

产品型号	尺寸	■	□
R881Y002	3/8"	1	100
R881Y003	1/2"	1	100

### R978



PE-RT pipe with anti-oxygen barrier, for heating and cooling radiant systems.  
PE-RT管 (带防渗抗氧层)

产品型号	尺寸	■	□
R978RY227	16x2	600	-
R978RY228	16x2	360	-
R978RY256	20x2	400	-

CERTIFICATION AND SYMBOLS





### R978G




PE-RT pipe without anti-oxygen barrier, for heating and cooling radiant systems.  
PE-RT管 (不带防渗抗氧层)

产品型号	尺寸	■	□
R978GY023	16x2	100	-
R978GY028	16x2	360	-
R978GY053	20x2	100	-
R978GY058	20x2	360	-

CERTIFICATION AND SYMBOLS

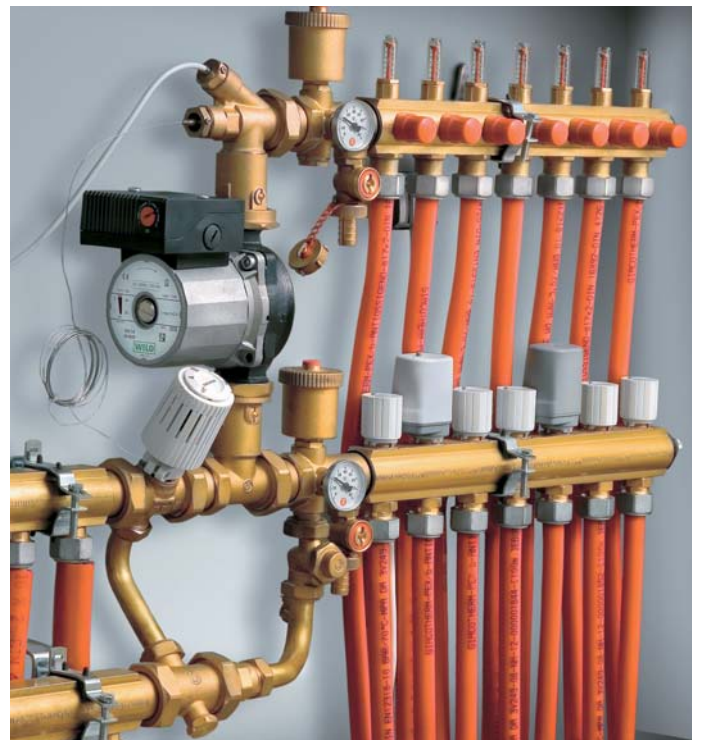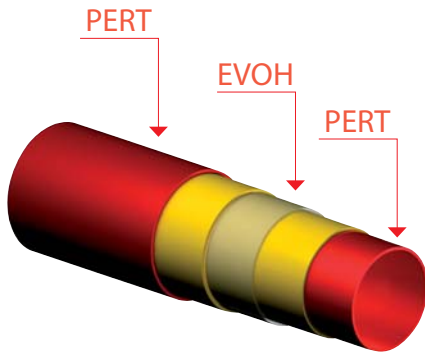

### BUSINESS CARD



### 附加信息

如需了解更多信息,请登陆嘉科米尼公司官网:[www.giacomini.cn](http://www.giacomini.cn)

☎ +86-010 84 86 27 75, 84 86 19 01

☎ +86-010 84 86 19 10

@ [customer.service.cn@giacomini.cn](mailto:customer.service.cn@giacomini.cn)

此技术资料仅供参考。嘉科米尼公司有权在不提前通知的情况下随时进行任何修改。用户或安装人员在参考此技术资料的同时,应该严格按照常规的技术要求进行操作。未经嘉科米尼公司同意,不得翻制部分或者全部本资料内容。

嘉科米尼采暖制冷科技(北京)有限公司

地址:北京市朝阳区东三环北路丙2号天元港中心A801室。

邮编: 100027